

Marine
Freezers

isotherm CRUISE FREEZERS

The perfect compliment to the standard fridge range!



Available options

- Custom door panel: door panel can be selected according to the customer needs
- Different flanges: 3 to 4 flanges available, in order to obtain flush mounted installation
- Different cooling systems: ventilated as standard, water cooled with a self pumping kit (patented) and water cooled through a sea water pump for tropical conditions
- Universal kit AC/DC optional: allows sufficient power supply all over the world

- 1 Extra insulation
- 2 12/24 V Danfoss compressor
- 3 Door with safety lock and magnetic rubber seal

Ask for documentation on drawer Freezers




Type	Volume litres	Dimensions HxWxD mm ¹	Weight Kgs	Power consumption* Average/max	Danfoss Compressor Type	Freezer compartment specifics
CR 65 F	65	620 x 525 x 510	20	1.5/5.0 A	BD35F	65 (-18°C)
CR 90 F	90	745 x 525 x 505	25	1.9/5.0 A	BD35F	90 (-21°C)
CR 63 F INOX	63	625 x 495 x 555	20	1.5/5.0 A	BD35F	63 (-18°C)
CR 63 FREEZER	63	625 x 495 x 555	20	1.5/5.0 A	BD35F	63 (-18°C)
CRUISE 65	63	625 x 495 x 555	20	1.5/5.0 A	BD35F	63 (-18°C)
CRUISE 65 INOX	63	625 x 495 x 555	20	1.5/5.0 A	BD35F	63 (-18°C)
CR 65 FREEZER	63	625 x 495 x 555	20	1.5/5.0 A	BD35F	63 (-18°C)
CR 90 F INOX	90	755 x 545 x 545	29	1.9/5.0 A	BD35F	90 (-21°C)

¹ With the option of universal AC/DC the depth increases by 20 mm.

* Indicates average/maximum Amp draw in operation in 12 volt with +6°C in the refrigeration space, ambient temperature +22°C.
Cut Out Dimensions: H+10 mm; W+5mm; D+5 mm

The CR 63 Freezer has the same outside dimensions as the CR 85 Fridge and makes a perfect pairing for side by side installations.

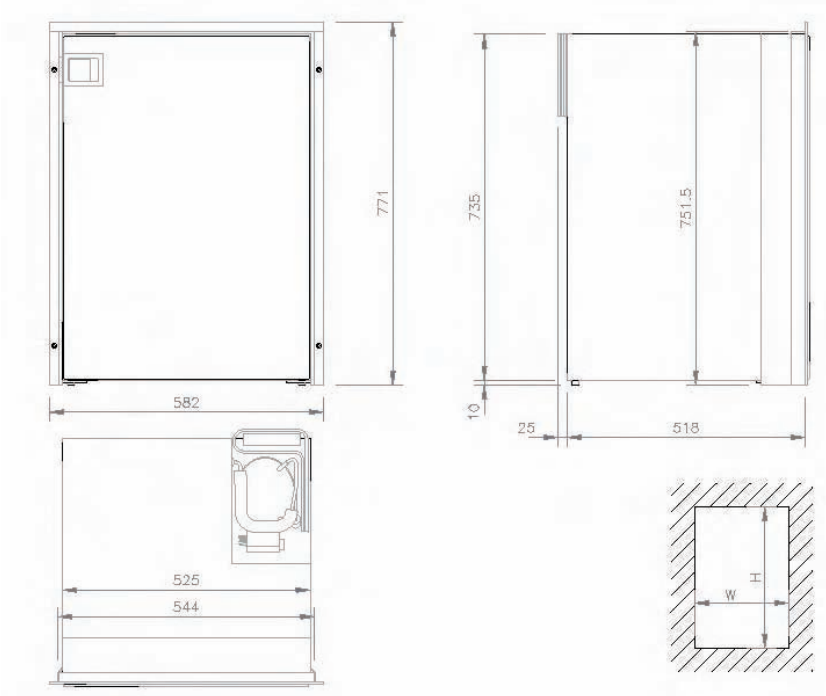

Webasto Product Australia Pty Ltd
 423-427 The Boulevard Kirrawee NSW 2232
 Ph +61(0)2 8536 4800 Fax +61(0)2 8536 4899
 Email : info@webasto.com.au

www.webasto-marine.com

Please refer to detailed installation and operation guidelines of Indel Webasto products