

USER MANUAL HOLLANDIA 700

Dear Madam, Sir,

Webasto Product International wishes you a lot of pleasure when driving with your newly installed Hollandia 700 sunroof. Your sunroof is a quality product from Webasto Product International, the Netherlands. Below you will find all you need to know about the Hollandia 700 tilting and sliding sunroof. In order to obtain the maximum enjoyment from the sunroof, please read these instructions carefully. Wishing you happy motoring.

SOFT-TOUCH CONTROL

By quickly pressing the switch (maximum 0,3 seconds) the sunroof will open ▲ or close ▼ immediately (depending on the position of the panel). Movement of the panel can be stopped by quickly pressing the switch again.

CLOSING OF THE SUNROOF

By briefly pushing the close button ●, regardless the panels position, the panel will close immediately.

AUTO-CLOSE

When turning off your vehicles ignition, the sunroof will make a beep sound to remind you that the auto-close will be activated. After three seconds the sunroof will close automatically which will be indicated by two beeps. Should you require the sunroof to stop, just briefly press the switch ▲ or ▼. You can also prevent the panel from closing by pressing the switch ▲ or ▼ during the three seconds interval. You may still close the sunroof when the ignition is off. When you switch the ignition on, the sunroof opens and closes in the normal way.

JAMMING PROTECTION

The jamming protection becomes active when the sunroof is closed either by soft-touch control or in auto-close mode. Should the panel encounter an obstacle while closing it immediately opens again. The sunroof will continuously try to close until the obstacle has been removed.

COMFORT POSITION

With this feature you are able to program two preset stopping positions of the panel in the sliding range of the sunroof. The panel will stop at the preset position when operating button 1 or 2.

PROGRAMMING THE COMFORT POSITION:

1. Place the panel in the desired preset position
2. Push button 1 and hold the button for about 3 seconds until you hear a beep.
3. Place the panel in the second desired preset position.
4. Push button 2 and hold the button for about 3 seconds until you hear a beep.

On opening the sunroof with the comfort button 1 or 2 the panel will stop in the preset position. Operating the ▲ switch again will open the sunroof completely.

CAUTION: WHEN THE GLASS PANEL IS IN TILT POSITION, THE SUNSHADE CANNOT BE COMPLETELY CLOSED. HOWEVER, IT CAN BE SLIDE OPEN TO ANY DESIRED POSITION.

MAINTENANCE

GLASS PANEL

The tinted glass panel is heat and UV resistant. To clean the glass panel use only a mild non-scratching detergent and a moist chamois leather. When starting your journey you are advised not to open the sunroof if there is moisture on the glass panel. Please drive for a few minutes to ensure that all moisture has disappeared, then open the roof.


WARRANTY

Webasto Product International warrants the quality and correct operation of this Webasto Hollandia 700 sunroof. The warranty covers both parts and labour and is valid for 3 years following the installation by and/or sale at one of the special Webasto Product International approved dealers.

The warranty applies only when the sunroof has been installed in accordance with Webasto Product International installation instructions. Defects caused by rough handling, incorrect use, accident and broken glass are not covered by this warranty.


Any transport costs are at the responsibility of the owner. The warranty is valid only when this form has been filled in completely and stamped by an approved dealer and submitted together with the invoice or receipt.

A

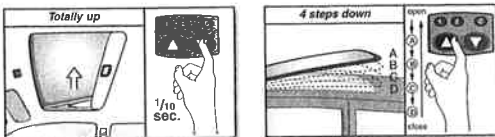


Openen naar hefstand	NL	P	Abrire para a posição levantada
Opening to tilt position	GB	K	“위로” 열림
Öffnen in Hebestellung	D	C	打開至傾斜位置
Ouverture en position entrebâillée	F	PL	Otwieranie do położenia podniesionego
Colocar el cristal en posición elevada	E	CZ	Otevírání okna do zvednuté polohy
Aktivierung af vippefunktion	DK	R	Открыть наверх
Åpne, panelet til vippe-posisjon	N	USA	Opening to tilt position

B

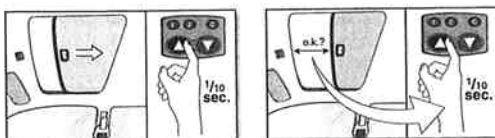


Openen naar schuifstand	NL	P	Abrire para a posição móvel
Opening to sliding position	GB	K	“뒤로” 열림
Öffnen in Schiebestellung	D	C	打開至滑移位置
Ouverture en position coulissée	F	PL	Otwieranie do położenia rozsuniętego
Deslizar el cristal	E	CZ	Otevírání okna do přesunutě polohy
Aktivierung af skydefunktion	DK	R	Отодвинуть назад
Åpne, panelet gliir bakover	N	USA	Opening to sliding position

C

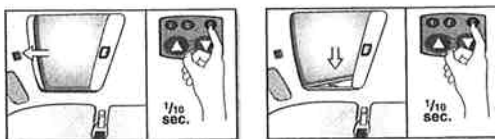

Sluiten van het dak	NL	P	Fechar o tecto
Closing the roof	GB	K	선루프 “닫힘”
Schließen des Daches	D	C	關閉天窗頂
Fermer le toit	F	PL	Zamykanie szyby
Cerrar el techo	E	CZ	Zavírání okna
Lukning af soltaget	DK	R	Закрывать люк
Lukke soltaget	N	USA	Closing the roof

D

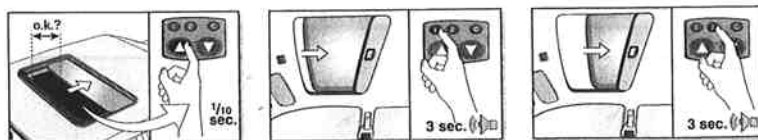

Comfortstand programmeren	NL	P	Programar posição-conforto
Programming the comfort position	GB	K	작동 위치 입력
Komfortstellung programmeren	D	C	調校至舒適位置
Programar la posición confort	F	PL	Programowanie położenia komfortowego
Programar posición confort	E	CZ	Programování pohodlného otírání
Programmering af komfortstilling	DK	R	Установка выбранного положения
Programmere komfort posisjonen	N	USA	Programming the comfort position