

Dear Customer,

Webasto Product North America, Inc. would like to thank you for purchasing a Hollandia TVS 900 Series Sunroof. Below you will find everything you need to know about your TVS 900 series twin vent sunroof. In order to achieve maximum sunroof functionality, please read through these instructions carefully. Happy motoring!

**SOFT TOUCH® SWITCH**

Make sure that your vehicle ignition is ON.

By quickly pressing the switch (approx. 0.1 seconds) the sunroof will open or close immediately (depending on the position of the panels). Movement of the panels can be stopped by quickly pressing the switch again.

By quickly pushing the single or double vent button, the glass panels will move immediately into the corresponding positions.

**CLOSING OF THE SUNROOF**

By quickly pushing the close button, regardless of the panels position, the panels will close immediately.

**AUTO-CLOSE**

When turning off your vehicles ignition, you will hear a beep sound to remind you that the auto-close will be activated. After three seconds the sunroof will close automatically and will let you know by beeping once.

Should you require the sunroof to stop, while closing, quickly press the switch or . You can also prevent the panels from closing by pressing the switch or during the three second interval.

When you switch the ignition on, the sunroof opens and closes in the normal manner.

**ANTI-PINCH PROTECTION (Safety Feature)**

The anti-pinch protection activates when the sunroof is closed either by soft-touch control or in auto-close mode.

Should either panel encounter an obstacle while closing, it immediately opens again:

- Ignition ON, Soft Touch control:  
The sunroof will try to close (max. 8 times) until the obstacle has been removed.
- Ignition OFF, Auto Close:  
If the sunroof detects an obstruction one time, the sunroof will stop and remain open and anti-pinch will be deactivated.

With this feature you are able to program a preset position for the panels of the sunroof. The panels will move to the preset position when quickly operating the comfort button.

**PROGRAMMING THE COMFORT POSITION:**

1. Place the panels in the desired position using button or .
2. Push the comfort button and hold the button for about 6 seconds until you hear a beep.

On opening the sunroof with comfort button (press approx. 0.1 sec.) the panels will stop in the preset position.

**ROCKER SWITCH**

**OPENING THE SUNROOF**

Make sure that your vehicles ignition is ON.

By quickly pressing the switch (approx. 0.1 seconds) the sunroof will open to the "double vent" position immediately.

By quickly pressing the switch again, the sunroof will move to the "single vent" position.

USER MANUAL HOLLANDIA TVS 900

By quickly pressing the switch a third time, the sunroof will move to the "max. slide open" position. Movement of the panel can be stopped by quickly pressing the switch again.

By continuously pressing the switch the glass panels will move from position "fully closed", via "double vent" and "single vent" to "max. slide open". Stop pressing the switch when the sunroof has reached the desired position.

**CLOSING OF THE SUNROOF**

By continuously pressing the switch the glass panels will close. Stop pressing the switch when the roof has reached the desired position.

**MAINTENANCE**

**GLASS PANELS**

The tinted glass panels are heat and UV resistant. To clean the glass panels use only a mild, non-scratching detergent and a moist cloth. When starting your journey you are advised not to open the sunroof if there is moisture on the glass panels. Please drive for a few minutes to ensure that all moisture has disappeared before opening the roof.

**CLEANING**

Keep all openings free of dirt, leaves, and other foreign objects. Clean the drain hoses when blocked.

**WARRANTY**

Webasto Product North America Inc. warrants the Webasto Hollandia TVS 900 sunroof series be free from defects and with good workmanship for their normal use.

The warranty covers all component parts and labor of the Hollandia TVS 900 series and is valid for a period of 3 years or 36,000 miles

(whichever occurs first) when installed and serviced by a Webasto Authorized Installer. This warranty is transferrable.

The warranty applies only when the sunroof has been installed in accordance with Webasto installation instructions. Defects caused by rough handling, incorrect use, accident and broken glass are not covered by this warranty. Transportation costs are at the responsibility of the owner.

Proof of original purchase with date of installation is required to receive warranty service.

All obligations of Webasto Product North America Inc. under this warranty shall be terminated if:


- Service is performed by someone other than a Webasto Authorized Installer.
- The product is modified or altered in a way not approved by Webasto Product North America Inc.
- The owner cannot produce evidence of original purchase, and installation date.

WEBASTO PRODUCT NORTH AMERICA INC MAKES NO OTHER WARRANTY OF ANY KIND WHATEVER, EXPRESS OR IMPLIED; AND ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE WHICH EXCEED THE ABOVE STATED OBLIGATIONS ARE DISCLAIMED BY WEBASTO PRODUCT NORTH AMERICA INC. AND EXCLUDED FROM THIS AGREEMENT.

# Soft Touch® Switch




**A**




- EN** Opening to double vent position
- ES** Abrir a posición de ventilación doble
- FR** Ouverture en position double ventilation

**B**




- EN** Opening to single vent position
- ES** Abrir a posición de ventilación sencilla
- FR** Ouverture en position simple ventilation

**C**

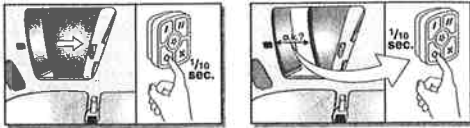


- EN** Opening the sunroof
- ES** Apertura a posición deslizante
- FR** Ouverture en position coulissée

**D**

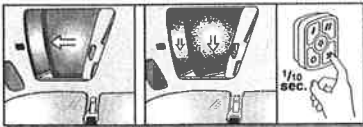

- EN** Closing the sunroof
- ES** Cierre del techo
- FR** Fermer le toit


**E**

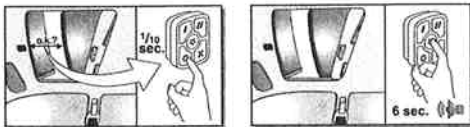

- EN** Programming the comfort position
- ES** Programación de la posición confort
- FR** Programmer la position confort

Note: Position the glass in the desired location and press and hold the program button for 6 seconds, until a beep is heard. Programming complete.

## Soft Touch® Button Description

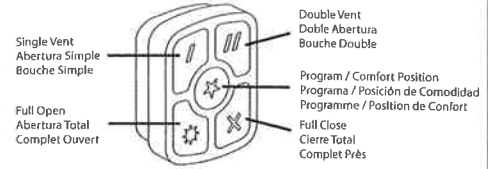

Note: You may also press and hold the button until the panel reaches your desired position, then release the button.